

FRONT LINKAGE

FS-4



- Parkable or permanently attached front linkage for tractors up to 190 HP, lifting power 2.800 kg or 4.800 kg
- Coupling brackets combinable with coupling plate for snow ploughs
- External linkage control combinable with ELC ergo, push buttons mounted on the front linkage
- Optional front PTO for many tractor types available

FRONT LINKAGE

FSK-18



- For tractors up to 70 HP, lifting power 1.800 kg
- Permanently attached front linkage
- External linkage control combinable with ELC ergo, push buttons mounted on the front linkage
- Optional front PTO for many tractor types available

ACCESSORIES

BDR-2.1



- Ground pressure control for optimum weight distribution of front mounted equipment and front axle of the vehicle
- Continuously adjustable relief of load over potentiometer, memory for up to 5 devices
- Optimum traction and protection of the soil while mowing, loosening soil and snow clearing

MOUNTING VARIANTS

SNOW PLOUGHS



- Coupling plate EURO Gr. 3 / 5, orig. Hauer, VSS-A, VSS-B
- 3-point attachment
- Communal linkage triangle
- Mounting frame for various wheel and telescopic loaders
- Special designs

SNOW BLADE

DRS-M



- Perfect for clearing sidewalks and narrow paths
- For small tractors and communal vehicles
- Blade height: 680 mm, widths: 1200 – 2000 mm

SNOW BLADE

HS



- Perfect for clearing access roads, paths, parking lots
- Blade height center/outside: 750/850 mm, widths: 2000 – 3000 mm

SNOW PLOUGH

SRS-L



- Lightweight snow plough, ideal for professional clearing on lower snow conditions
- SRS-2 L two blades or SRS-3 L three blades
- Blade height center/outside: 850/1000 mm, widths: 2400 – 3200 mm

SNOW PLOUGH

SRS



- Perfect on higher snow conditions for challenging professional snow clearing
- SRS-2 two blades or SRS-3 three blades
- Blade height center/outside: SRS-2 1050/1220 mm, SRS-3 1200/1400, widths: 2800 – 3600 mm

SNOW PLOUGH

VARIO VS-L



- Ideal for clearing crossroads, roads with driveways, squares and parking lots
- Variable adjustable snow plough with two blades
- Blade height center/outside: 890/1000 mm, widths: 2400 – 3200 mm

SPREADER

TS-3



- Capacity 0,7 m³ / 1 m³ / 1,5 m³
- Spreading width 1 – 8 m
- Compact, close mounting to the tractor for optimum weight distribution
- Container zinc coated and painted, spreader disk and guide plate from stainless steel

SCRAPER


HP-2461



- Rear leveling scraper for preparation and maintaining of paths in agriculture, forestry and communal services
- Extreme stable and solid design for heaviest tasks
- Hydraulically adjustable for different tasks: lateral, horizontal and swing out adjustment, hydraulic support wheel optional
- Blade width: 2.400 mm, blade height: 610 mm

FORESTRY

PROTECTION

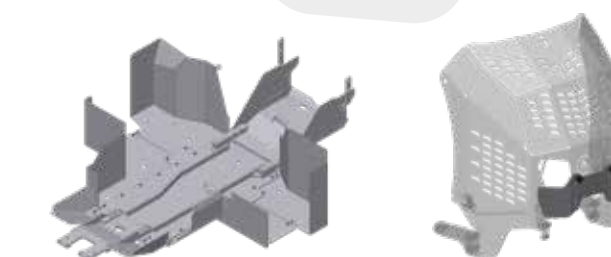

- Short underbody protection
- Profi underbody plate for protection from below and the sides, guards the fuel tank
- Forestry front guard
- Forestry engine hood protection protects the front, side and top of the engine hood, can be folded to the front, no additional tools needed



PRODUCT OVERVIEW

INNOVATION WITH TRADITION FOR LIFE.



FRONT LOADER XB BIONIC II

- Professional front loader for tractors from 50 up to 280 HP
- Tilting cylinders and mechanical parallel guidance with patented X-Kinematic integrated in the cavity of the loader arm
- Optimum view of the attachment and the working area, as well as ergonomically arranged control elements
- Easy and fast attachment of the loader and attachments
- Quick and easy cleaning, even with heavy dirt
- Up to 30% more crowding force
- Front loader sizes 50 to 110 with brackets Top-Block system TBS or Oberrahmen system
- Front loader sizes 130 to 190 with bracket system TBS-HV with serial automatic locking, optimized for large tractors



- Robust loader arm with double-walled cross beam - suitable for the toughest operating conditions
- Hydraulic component group "MCV" protected inside the cross beam, up to 4 additional hydraulic functions available
- Extensive range of implements and accessories for professional and special use (camera, LED lights, central lubrication)



FRONT LOADER POM-R



- Lightweight all-round front loader for tractors from 40 up to 110 HP
- Mechanical parallel guidance
- Stable loader arm profile
- Hydraulic component system expandable up to two additional hydraulic functions
- Hydraulic lines protected on the bottom of the loader arm
- Proven bracket system TBS, optional with eccentric bolt locking or Oberrahmen-System




ATTACHMENTS AND ACCESSORIES



Buckets

Earth bucket, light material bucket, high-volume bucket, high-tip bucket, silage grab, multi grab bucket, 5 in 1 multifunction bucket, ...

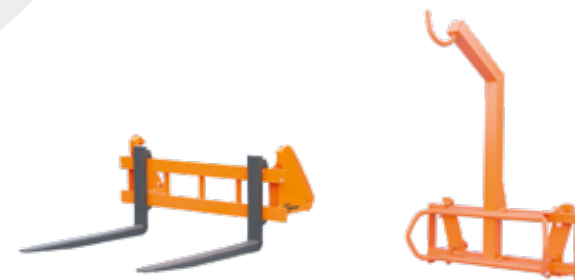

Lifting devices

Various pallet forks with different equipment, big-bag-lifter, load hooks, extension arm for load hook, fork lift, ...



Agriculture

Multi grab fork, silage grab fork, bale fork, silage bale grab, round bale grab, silage grab, high-tip silage grab, ...



ATTACHMENTS AND ACCESSORIES




Forestry

Log grapple, brushwood grab, forestry grab bucket, logging blade, timber grabs ...



Adapters

3-point quick attach carriage, carriage adapter, 3-point adapter, ...



Different mounting systems

For wheel loaders and telescopic loaders, as an alternative for Hauer or Euro hooks



ATTACHMENTS AND ACCESSORIES



Control valves

Joystick cable remote control valve, electro proportional control unit ELC ergo 2



Special implements

Cage, hydraulic attachment locking system, hydraulic slewing mechanism, ...



Ballast weights

Front and rear ballast weights from 450 up to 2.500 kg



© Hauer V5. Images shown may differ from standard delivery. Errors excepted and technical changes reserved.



Franz Hauer GmbH & CoKG
A-3125 Statzendorf, Werksstraße 6
Tel.: +43 / (0)2786 / 7104-0
info@hfl.co.at | www.hfl.co.at